



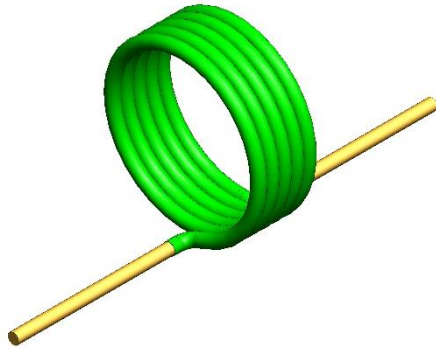

Kit #4 – Gold Air Coil

(High Frequency Applications)



Features

- Micro-size pure gold air coils
- Inductance values from 8 nH
- Precision insulation removal for repeatable mounting
- Extremely low insertion loss
- Perfect for high frequency filters

Kit #4 – Inductor Specification


Part Number	L (nH) +/-10%	Q Min	I Max (mA)	SRF Typ. (GHz)	Test Freq. (MHz)	DCR Max (Ohms)	Length Nom. (Inches)	Wire Size (AWG)	Turns
MG3T47.018SXS-00	8	26	100	10.0	200	0.25	0.005	47	3
MG5T47.018SXS-00	15	29	100	9.0	200	0.30	0.010	47	5
MG10T47.018SXS-00	40	23	100	7.5	100	0.50	0.017	47	10
MG15T47.018SXS-00	60	24	100	6.0	100	0.65	0.026	47	15
MG20T47.018SXS-00	95	25	100	4.5	100	0.80	0.034	47	20
MG30T47.018SXS-00	150	17	100	2.5	25	1.10	0.050	47	30

Custom configurations available upon request - Contact Piconics for more info.

*SRF is typical performance on 10 mil alumina


Mechanicals:

Wire	47 Awg 99.9% Gold
Insulation	155°C Poly-Nylon
Lead Finish	99.9% Gold
Packaging	Individual Pill Capsules

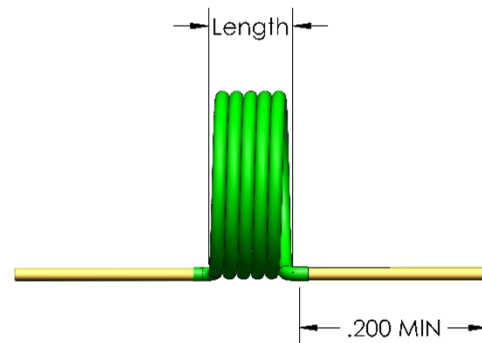

Environmental:

Operating Temp.	-55°C to 125°C
Storage Temp.	-55°C to 125°C
RoHS Compliant	Yes



Not Drawn To Scale
Dimensions in Inches



www.piconics.com

ISO 9001:2015

Established 1963

26 Cummings Road | Tyngsboro, MA 01879 | P: 978-649-7501 | sales@piconics.com



Rev A-2021