


Microwave Air Coil Ordering Code

MG XX T XX.020 H R S - 10

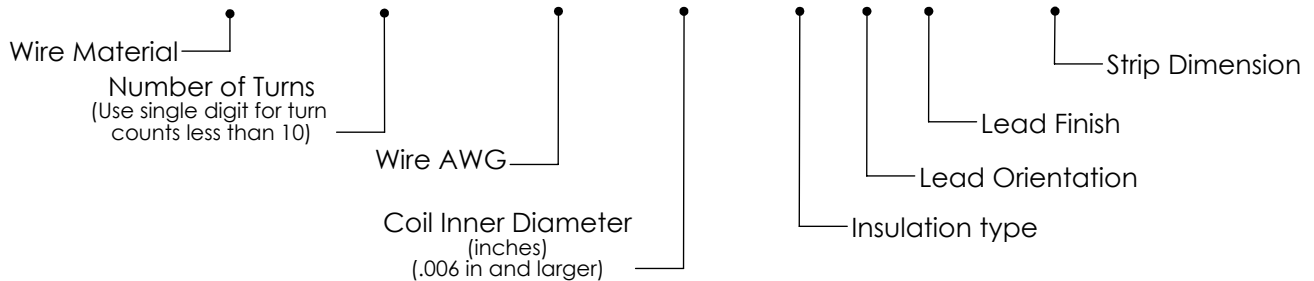

Wire Material

M = Copper Wire
 MG = Gold Wire
 MK = 5-10 Micro-Inch Gold Plated Copper Wire

Lead Finish

N = None
 T = Tinned (.050 to .100 Of The Body Only)(Sn63)
 G = Gold plated to 100 um*
 S = Stripped

Insulation Type

H = High Temp (180°C Or Higher Thermal Class)
 S = Standard 155°C Thermal Class
 F = Solderable 105°C Thermal Class



Stripping Dimension

10 = Stripped within .010 inches of the coil body*
 00 = Stripped To the Body (up to 1/4 turn in)*
 Leave Blank if unstripped


***Minimum Qty Required for this operation**

Lead Orientation


R = Radial
 O = Opposed
 A = Axial
 X = Special Axial



Piconics Radial Lead Orientation
 (Count Turns Between Leads)



Piconics Opposed Lead Orientation
 (Count Turns On Top)



Piconics Standard-Axial Lead Orientation
 (Count Turns Between Leads)



Piconics Special - Axial Lead Orientation
 (Count Turns On Top)